

Molex 46015-0203 PDF

深圳创唯电子有限公司










<http://www.molex-connect.com>



PRODUCT SPECIFICATION

PRODUCT SPECIFICATION FOR Mini-Fit Plus HCS™


INTERCONNECT SYSTEMS

 <p>46012 Male Terminal</p>  <p>5559 Plug Housing</p>	 <p>45750 Female Terminal</p>  <p>5557 Receptacle Housing</p>	 <p>46015 Vertical Header</p>  <p>5569 Right Angle Header</p>
Crimp Terminals and Housing for Wire-Wire		Headers for Wire-Board
 <p>42475 BMI Plug Housing</p>	 <p>44516 BMI Slide and Lock Receptacle</p>	 <p>42474 BMI Receptacle w/ Spirals</p>
BMI Style Panel Mount Housings for Wire-Panel, Panel-Panel and Panel-Board		

REVISION: C1	ECR/ECN INFORMATION: EC No: UCP2011-0141 DATE: 2010 /07/15	TITLE: PRODUCT SPECIFICATION FOR MINI-FIT PLUS HCS CONNECTOR SYSTEM	SHEET No. 1 of 13
DOCUMENT NUMBER: PS-45750-001	CREATED / REVISED BY: BWIRKUS	CHECKED BY: BWIRKUS	APPROVED BY: APATEL



PRODUCT SPECIFICATION

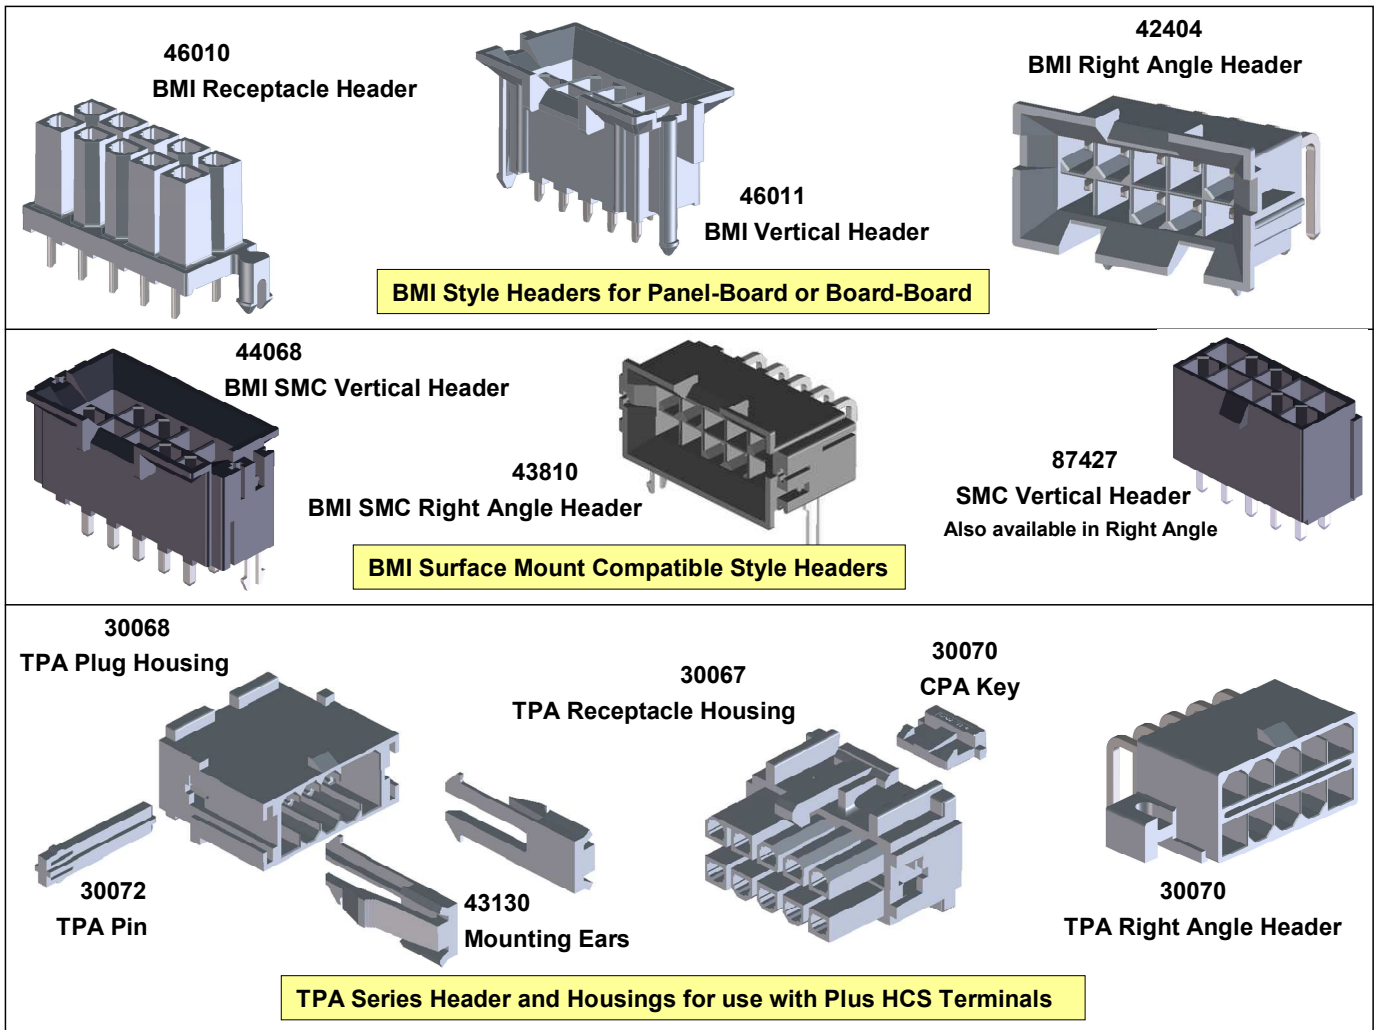

Product feature designations:

- BMI Blind Mate Interface – features allowing easier alignment in panel-board and board to board applications.
- SMC Surface Mount Compatible - reflow solder temperatures up to 245°C.
- TPA Terminal Position Assurance – helps ensure crimp terminals are fully engaged and prevents terminals from backing out in high vibration applications.
- CPA Connector Position Assurance – assures housing cannot be inadvertently disengaged.

REVISION: C1	ECR/ECN INFORMATION: EC No: UCP2011-0141 DATE: 2010 /07/15	TITLE: PRODUCT SPECIFICATION FOR MINI-FIT PLUS HCS CONNECTOR SYSTEM	SHEET No. 2 of 13
DOCUMENT NUMBER: PS-45750-001	CREATED / REVISED BY: BWIRKUS	CHECKED BY: BWIRKUS	APPROVED BY: APATEL



PRODUCT SPECIFICATION

MINI-FIT PLUS HCS

TABLE OF CONTENTS

SECTION	PAGE
1.0 <u>Scope</u>	4
2.0 <u>Product Description</u>	4-5
2.1 Names and Series Numbers	4
2.2 Dimensions, Materials, Platings, and Markings	5
2.3 Safety Agency Approvals	5
3.0 <u>Applicable Documents and Specifications</u>	5
4.0 <u>Packaging</u>	5
5.0 <u>Ratings</u>	5-6
5.1 Voltage	5
5.2 Applicable Wires	5
5.3 Temperature	5
5.4 Wave Solder Process Temperature	5
5.5 Durability (Mating Cycles)	5
5.6 Maximum Current Carrying Capacities	6
Wire-To-Wire	
Wire-To-Board	
Board-To-Board	
6.0 <u>Product Performance Tests and Requirements</u>	7-9
5.1 Electrical Requirements	7
5.2 Mechanical Requirements	7
5.3 Environmental Requirements	9
7.0 <u>Test Sequences</u>	11-13

REVISION: C1	ECR/ECN INFORMATION: EC No: UCP2011-0141 DATE: 2010 /07/15	TITLE: PRODUCT SPECIFICATION FOR MINI-FIT PLUS HCS CONNECTOR SYSTEM	SHEET No. 3 of 13
DOCUMENT NUMBER: PS-45750-001	CREATED / REVISED BY: BWIRKUS	CHECKED BY: BWIRKUS	APPROVED BY: APATEL



PRODUCT SPECIFICATION

1.0 SCOPE

This Product Specification covers the electrical, mechanical and environmental performance requirements for the **Mini-Fit Plus HCS™** (High Current System) in 4.20 mm (.165 inch) pitch. The **Mini-Fit Plus HCS™** uses contacts stamped in High Performance Alloy for increased current carrying capacity, while maintaining properties at elevated operating temperatures. Wire-Wire, Wire-Panel, Wire-Board, Panel-Panel, Panel-Board, and Board-Board configurations in Tin and Gold plated systems. Crimp terminals accept 16 to 20 AWG stranded wire.

2.0 PRODUCT DESCRIPTION

2.1 SERIES NUMBERS, DESCRIPTION, SALES DRAWING NUMBERS

SERIES	DESCRIPTION	SALES DRAWING	TPA	BMI	SMC	AGENCY APP'L
CRIMP TERMINALS						
45750	Female Crimp Terminal	SD-46012-001				NA
46012	Male Crimp Terminal	SD-45750-001				NA
HOUSINGS						
5557	Receptacle Housing	SD-5557-003				U,C,T
5559	Plug Housing	SD-5559-NP				U,C,T
42475	Panel Mount BMI Plug Housing	SD-42475-***1		X		U,C,T
43770	Panel Mount Plug Housing, 36 Ckt	SD-43770-001		X		U,C,T
42474	Panel Mount Receptacle Housing	SD-42474-****		X		U,C,T
43974	Panel Mount Receptacle Hsg 40 Ckt	SD-43974-005			X	U,C,T
44516	Panel Mount Receptacle Housing, Slide-and-Lock	SD-44516-00*		X		U,C
30067	TPA Receptacle Housing	SD-30067-*	X			U,C,T
30068	Panel Mount TPA Plug Housing	SD-30068-*	X	X		U,C,T
VERTICAL HEADERS						
44068	Vertical BMI SMC Header, solid pin	SD-44068-031		X	X	U,C,T
46010	Vertical PCB Receptacle Header	SD-46010-001		X		U,C
46011	Vertical BMI Header	SD-46011-001		X		U,C
46014	Vertical Header, single row	SD-46014-001				U,C
46015	Vertical Header, dual row	SD-46015-001				U,C
87427	Vertical SMC Header	SD-87427-***4*			X	U,C
RIGHT ANGLE HEADERS						
5569	Right Angle Header	SD-5569-002				U,C,T
30070	Right Angle TPA Header with mounting flanges	SD-30070-001	X			U,C,T
		SDA-30070-****				
42404	Right Angle BMI Header	SDA-42404-****		X		U,C,T
43810	Right Angle BMI SMC Header	SD-43810-0**		X	X	U,C,T
43973	Right Angle Header, 40 Ckt	SD-43973-00*		X	X	U,C,T
45567	Right Angle Header, 36 Ckt	SD-45567-001		X		U,C
87427	Right Angle SMC Header	SD-87427-***0*, -***1*, -***2*			X	U,C

Agency Approval designations:

U-UJL C-CSA T-TUV

REVISION: C1	ECR/ECN INFORMATION: EC No: UCP2011-0141 DATE: 2010 /07/15	TITLE: PRODUCT SPECIFICATION FOR MINI-FIT PLUS HCS CONNECTOR SYSTEM	SHEET No. 4 of 13
DOCUMENT NUMBER: PS-45750-001	CREATED / REVISED BY: BWIRKUS	CHECKED BY: BWIRKUS	APPROVED BY: APATEL



PRODUCT SPECIFICATION

2.2 DIMENSIONS, MATERIALS, PLATINGS AND MARKINGS

For details regarding dimensions, materials and terminal platings, refer to the appropriate sales drawings for further information.

2.3 SAFETY AGENCY APPROVALS

UL File: E29179
CSA Certificate: LR19980
TUV Certificate: R72081037

3.0 APPLICABLE STANDARDS AND SPECIFICATIONS

- EIA-364-1000
- Molex solderability specification SMES-152

4.0 PACKAGING

Parts shall be packaged to protect against damage during normal handling, transit and storage. For details refer to the Packaging Specification as called out on the applicable product Sales Drawing.

5.0 RATINGS

5.1 VOLTAGE

600 Volts AC RMS or 600 Volts DC

5.2 APPLICABLE WIRES

WIRE GAUGE	INSULATION DIAMETER
16 AWG	1.80-3.10 millimeters / .071-.122 inches
18-20 AWG	1.65-2.95 millimeters / .065-.116 inches

5.3 TEMPERATURE RATING

Mini-Fit Plus HCS has a field temperature of 65°C and field life rating for 10 years based on testing per EIA-364-17B, Method A.

5.4 WAVE SOLDER PROCESS TEMPERATURE

Headers with molded pegs: 240°C MAX.
Headers without pegs: 265°C MAX

5.5 DURABILITY (MATING CYCLES)

Tin: 100 cycles
Gold: 250 cycles

Durability ratings established as tested per Durability Test Procedures described by EIA-364-09C and meet requirements for low level contact resistance and DWV as prescribed per EIA-364-1000 Test Sequence Group 7.

REVISION: C1	ECR/ECN INFORMATION: EC No: UCP2011-0141 DATE: 2010 /07/15	TITLE: PRODUCT SPECIFICATION FOR MINI-FIT PLUS HCS CONNECTOR SYSTEM	SHEET No. 5 of 13
DOCUMENT NUMBER: PS-45750-001	CREATED / REVISED BY: BWIRKUS	CHECKED BY: BWIRKUS	APPROVED BY: APATEL



PRODUCT SPECIFICATION

5.6 MAXIMUM CURRENT RATING (AMPERES)**

WIRE-TO-WIRE									
Wire Size	Single Row Circuit Sizes			Dual Row Circuit Sizes					
	3	4	5	2	4	6, 8	10, 12	14, 16, 18	20, 22, 24
16 AWG	13A	12.5A	12A	13A	12A	11A	10.5A	10A	9.5A
18 AWG	11A	10.5A	10A	11A	10A	9A	8.5A	8A	7.5A
20 AWG	9.5A	9A	9A	9.5A	8.5A	8A	7.5A	7A	6.5A

WIRE-TO-BOARD									
Wire Size	Single Row Circuit Sizes			Dual Row Circuit Sizes					
	3	4	5	2	4	6, 8	10, 12	14, 16, 18	20, 22, 24
16 AWG	12.5A	12A	11.5A	12.5A	11.5A	10A	9A	8.5A	8.0A
18 AWG	10.5A	10A	9.5A	10.5A	9.5A	8.5A	8A	7.5A	7A
20 AWG	9A	8.5A	8.5A	9A	8A	7A	6.5A	6A	5.5A

BOARD-TO-BOARD						
Dual Row Circuit Sizes						
2	4	6, 8	10, 12	14, 16, 18	20, 22, 24	
11.5A	11A	9.5A	8A	6.5A	5A	

** Ratings shown represent *MAXIMUM* current carrying capacity of a fully loaded connector with all circuits powered. Ratings are based on a 30°C maximum temperature rise limit over ambient (room temperature). Testing conducted with tinned copper conductor stranded wire. Above charts are intended as a guideline. Current rating is application dependent. Appropriate de-rating is required depending on factors such as higher ambient temperature, smaller copper weight of PCB traces, gross heating from adjacent modules or components and other factors that influence connector performance.

REVISION: C1	ECR/ECN INFORMATION: EC No: UCP2011-0141 DATE: 2010 /07/15	TITLE: PRODUCT SPECIFICATION FOR MINI-FIT PLUS HCS CONNECTOR SYSTEM	SHEET No. 6 of 13
DOCUMENT NUMBER: PS-45750-001	CREATED / REVISED BY: BWIRKUS	CHECKED BY: BWIRKUS	APPROVED BY: APATEL



PRODUCT SPECIFICATION

6.0 PRODUCT PERFORMANCE TESTS & REQUIREMENTS

6.1 ELECTRICAL REQUIREMENTS

ITEM	TEST	TEST PROCEDURE	REQUIREMENT
1	Contact Resistance (Low Level)	EIA-364-23: Mate connectors; apply a maximum voltage of 20 mV and a current of 100 mA. Wire resistance shall be removed from the measured value.	10 mΩ Maximum Initial resistance for each test sequence. Resistance measurements for subsequent tests are the Maximum change from Initial as specified.
2	Insulation Resistance	Mate connectors: apply a voltage of 500 VDC between adjacent terminals and between terminals to ground.	1000 Megohms MINIMUM
3	Dielectric Withstanding Voltage	EIA-364-20: Apply a voltage of 1500 VAC for 1 minute between adjacent contacts.	No breakdown. Current leakage < 5 mA
4	Temperature Rise (via Current Cycling)	EIA-364-70 (Temperature Rise) & EIA-364-55 (Current Cycling): Apply current to mated connectors & incrementally increase until specified T-Rise is reached to establish rated current. Measure the T-Rise at the rated current after 96 hours, during current cycling (45 minutes ON and 15 minutes OFF per hour) for 240 hours, and after final 96-hour steady state.	Temperature rise: +30°C MAXIMUM

6.2 MECHANICAL REQUIREMENTS

ITEM	TEST	TEST PROCEDURE	REQUIREMENT
1	Terminal Mate / Unmate Forces Per Circuit for: Wire – Wire; Wire – Board (formed pin header); and Wire – Board (solid pin header)	Mate and unmate female to male crimp terminal or female terminal to header at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute. Testing to be conducted with individual (single) circuit. Measure and record the maximum mate and unmate forces across 5 mating cycles.	Tin, W-W & W-B (formed pin): Mate: 15.6 N (3.50 lbf) MAX. Unmate: 13.8N (3.10 lbf) MAX. Gold, W-W & W-B (formed pin): Mate: 4.9 N (1.10 lbf) MAX. Unmate: 4.0 N (0.91 lbf) MAX. Tin, W-B (solid pin): Mate: 10.5 N (2.36 lbf) MAX. Unmate: 11.0N (2.47 lbf) MAX. Gold, W-B (solid pin): Mate: 3.4 N (0.77 lbf) MAX. Unmate: 2.8 N (0.63 lbf) MAX.

REVISION: C1	ECR/ECN INFORMATION: EC No: UCP2011-0141 DATE: 2010 /07/15	TITLE: PRODUCT SPECIFICATION FOR MINI-FIT PLUS HCS CONNECTOR SYSTEM	SHEET No. 7 of 13
DOCUMENT NUMBER: PS-45750-001	CREATED / REVISED BY: BWIRKUS	CHECKED BY: BWIRKUS	APPROVED BY: APATEL



PRODUCT SPECIFICATION

6.2 MECHANICAL REQUIREMENTS (CON'D)

ITEM	TEST	TEST PROCEDURE	REQUIREMENT
2	Normal Force	Apply a perpendicular force simultaneously to each beam until the desired total deflection is achieved. Return to original size, then deflect beams a second time and measure normal force.	3.5 N (360 g) MINIMUM
3	Durability	Per EIA-364-09C, mate connectors 100 cycles for tin plated product, 250 cycles for gold plated product at a maximum rate of 500 cycles per minute.	10 mΩ Max. chg. from Initial; Visual: No Damage
4	Durability (preconditioning)	Mate connectors by hand, 20 cycles for tin plated product, 50 cycles for gold as required prior to environmental test sequence as indicated.	Visual: no damage
5	Reseating	Unmate / mate connectors by hand three cycles.	Visual: no damage
6	Vibration (Random)	EIA 364-28: Mate connectors and vibrate per, test condition VII.	10 mΩ Max. chg. from Initial; Discontinuity < 1 microsecond
7	Crimp Terminal Insertion Force (into housing)	Apply an axial insertion force on the terminal at a rate of 25 ± 6 mm (1 ± ¼ inches).	15.0 N (3.37 lbf) MAXIMUM insertion force
8	Crimp Terminal Retention Force (in housing)	Axial pullout force on the terminal in the housing at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute.	30 N (6.74 lbf) MINIMUM retention force
9	Wire Crimp Retention	Apply an axial pullout force on the wire at a rate of 25 ± 6 mm (1 ± ¼ inches) per minute.	16 Awg = 68.4 N (15.4 lbf) Min. 18 Awg = 68.4 N (15.4 lbf) Min. 20 Awg = 58.7 N (13.2 lbf) Min.
10	Thumb Latch Operation Force	Depress latch at a rate of 25 ± 6mm (1 ± ¼ inches) per minute.	16.7 N (3.75 LBF) MAX.
11	Thumb Latch Yield Strength	Manually mate and unmate unloaded housings for 30 cycles. Following the 30 th mate, pull apart housings in an axial direction at a rate of 25 ± 6mm (1 ± ¼ inches) per minute.	75.2 N (16.9 LBF) MIN.

REVISION: C1	ECR/ECN INFORMATION: EC No: UCP2011-0141 DATE: 2010 /07/15	TITLE: PRODUCT SPECIFICATION FOR MINI-FIT PLUS HCS CONNECTOR SYSTEM	SHEET No. 8 of 13
DOCUMENT NUMBER: PS-45750-001	CREATED / REVISED BY: BWIRKUS	CHECKED BY: BWIRKUS	APPROVED BY: APATEL



PRODUCT SPECIFICATION

6.2 MECHANICAL REQUIREMENTS (CON'D)

ITEM	TEST	TEST PROCEDURE	REQUIREMENT	
12	Header Solid Pin Retention Force in Housing	Axial pullout force on the terminal in the housing at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute.	Tin	4.45 N (1.00 lbf) MINIMUM
			Gold	4.45 N (1.00 lbf) MINIMUM
13	Header Stamped Pin Retention Force in Housing	Axial pullout force on terminal from housing at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute.	30 N (6.74 lbf) MINIMUM retention force	
14	PCB Peg Engagement and Separation Forces	Engage and separate a connector at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute. (Applies to parts with PCB retention features only)	98.0 N (22.0 lbf) MAX. insertion force; 10.0 N (2.24 lbf) MIN. withdrawal force	

6.3 ENVIRONMENTAL REQUIREMENTS

ITEM	TEST	TEST PROCEDURE	REQUIREMENT
1a	Temperature Life Group 1	Per EIA-364-17, method A: mate connectors and expose to 240 hours at 105 ± 2°C.	10 mΩ Max. chg. from Initial; Visual: No Damage
1b	Temperature Life (preconditioning) Groups 3 & 5	Per EIA-364-17, method A: mate connectors and expose to 120 hours at 105 ± 2°C.	10 mΩ Max. chg. from Initial; Visual: No Damage
1c	Temperature Life (preconditioning) Group 4	Per EIA-364-17, method A: mate connectors and expose to 300 hours at 105 ± 2°C.	10 mΩ Max. chg. from Initial; Visual: No Damage
2	Thermal Shock	Per EIA-364-32, method A, test condition I, test duration A-4: mate connectors and expose for 10 cycles between -55°C and 105° C; dwell 0.5 hours at each temperature.	10 mΩ Max. chg. from Initial; Visual: No Damage Dielectric Strength per 5.1.3 Insulation Resistance per 5.1.2
3	Cyclic Temperature & Humidity	Per EIA-364-31, method III w/o conditioning, initial measurements, cold shock and vibration. Cycle mated connectors between 25°C ±3°C @ 80% ±3% RH and 65°C ±3°C @ 50% ±3RH. Ramp time: 0.5 hr.; dwell time: 1 hr. Perform 24 cycles.	10 mΩ Max. chg. from Initial; Visual: No Damage

REVISION: C1	ECR/ECN INFORMATION: EC No: UCP2011-0141 DATE: 2010 /07/15	TITLE: PRODUCT SPECIFICATION FOR MINI-FIT PLUS HCS CONNECTOR SYSTEM	SHEET No. 9 of 13
DOCUMENT NUMBER: PS-45750-001	CREATED / REVISED BY: BWIRKUS	CHECKED BY: BWIRKUS	APPROVED BY: APATEL



PRODUCT SPECIFICATION

6.3 ENVIRONMENTAL REQUIREMENTS (CON'D)

4	Mixed Flowing Gas	Per EIA-364-65 with Class IIA gas concentrations following Telcordia Specification GR1217.	10 mΩ Max. chg. from Initial; Visual: No Damage
5	Thermal Cycling	Per EIA-364-1000 Test Group 5: Cycle mated connector between 15°C±3°C and 85°C±3°C as measured on the part. Ramps should be a minimum of 2°C per minute, and dwell times should insure contacts reach the temperature extremes (minimum of 5 minutes). Humidity is not controlled. Perform 500 cycles.	10 mΩ Max. chg. from Initial; Visual: No Damage
6	Solderability	Per SMES-152	Solder coverage: 95% MINIMUM (per SMES-152)
7	Solder Temperature Heat Transfer Resistance	Expose connector terminals tails to wave solder process. Dwell time duration: 5 ± 0.5 seconds; Solder Temperature: 260 ± 5°C	Visual: No Damage to the insulator where terminal or pin locks to the connector housing.


REVISION: C1	ECR/ECN INFORMATION: EC No: UCP2011-0141 DATE: 2010 /07/15	TITLE: PRODUCT SPECIFICATION FOR MINI-FIT PLUS HCS CONNECTOR SYSTEM	SHEET No. 10 of 13
DOCUMENT NUMBER: PS-45750-001	CREATED / REVISED BY: BWIRKUS	CHECKED BY: BWIRKUS	APPROVED BY: APATEL



PRODUCT SPECIFICATION

7.0 TEST SEQUENCES

Environmental test sequences for Groups 1, 2, 3, 5 and 7 performed in accordance with EIA-364-1000. Sequence for Group 4 per Nortel Optical Networks specification test plan.

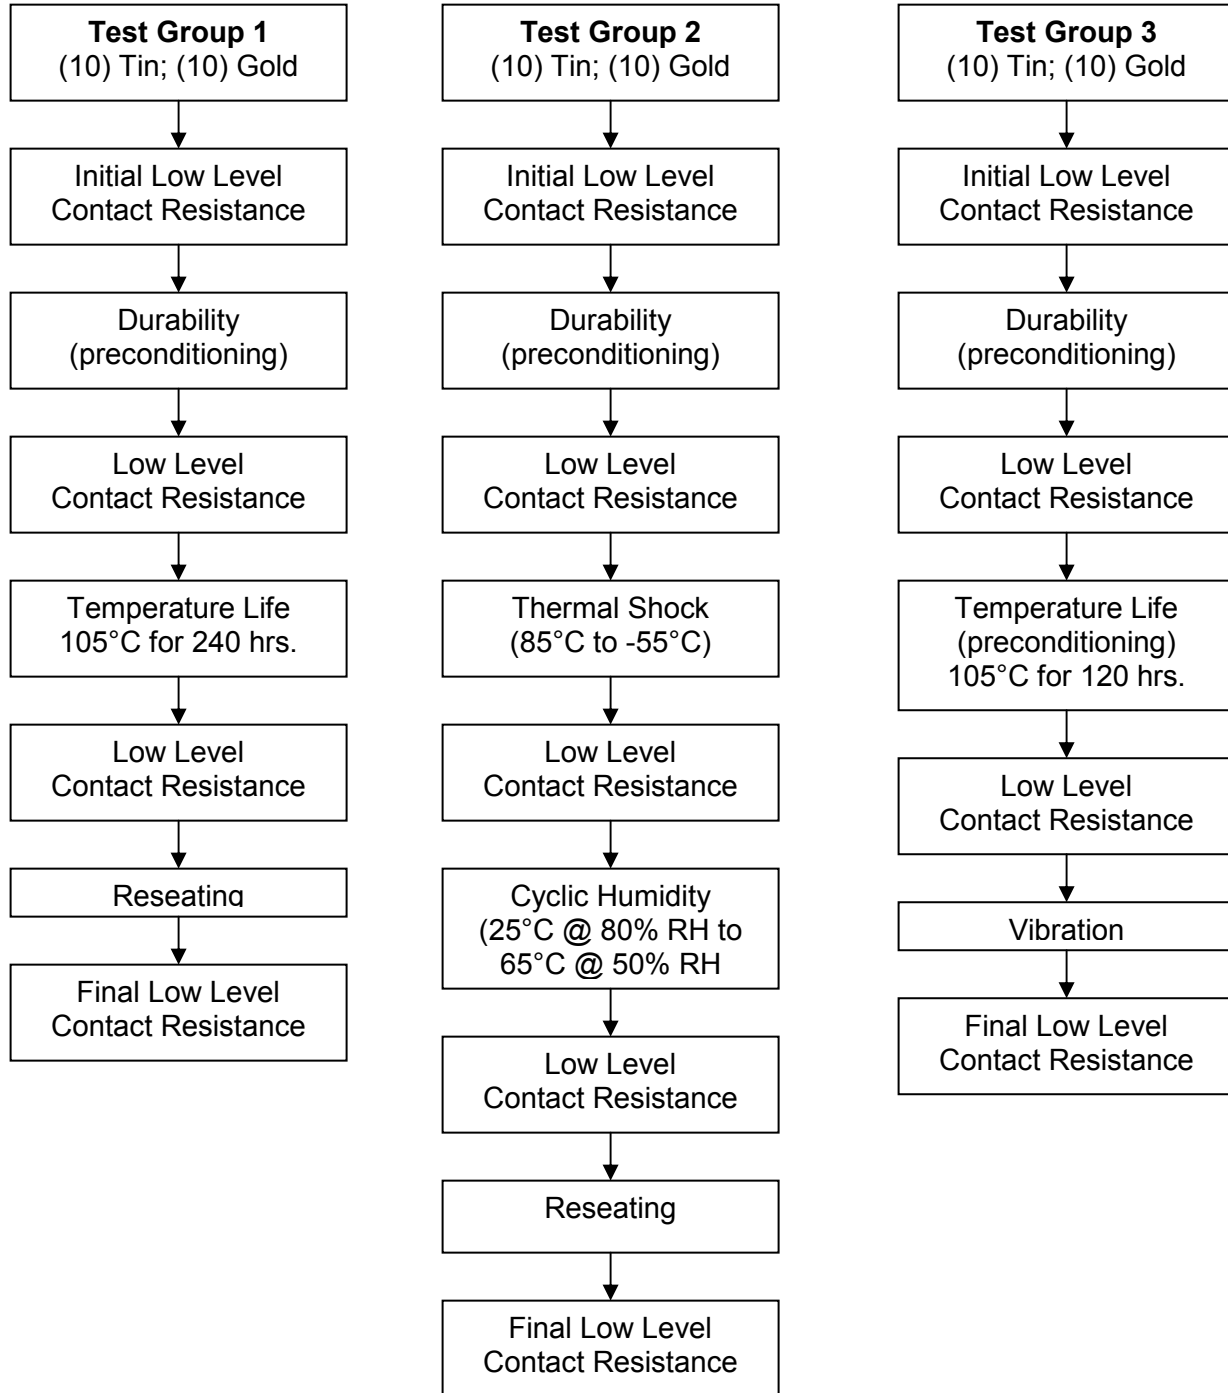


REVISION: C1	ECR/ECN INFORMATION: EC No: UCP2011-0141 DATE: 2010 /07/15	TITLE: PRODUCT SPECIFICATION FOR MINI-FIT PLUS HCS CONNECTOR SYSTEM	SHEET No. 11 of 13
DOCUMENT NUMBER: PS-45750-001	CREATED / REVISED BY: BWIRKUS	CHECKED BY: BWIRKUS	APPROVED BY: APATEL



PRODUCT SPECIFICATION

7.0 TEST SEQUENCES (CON'D)

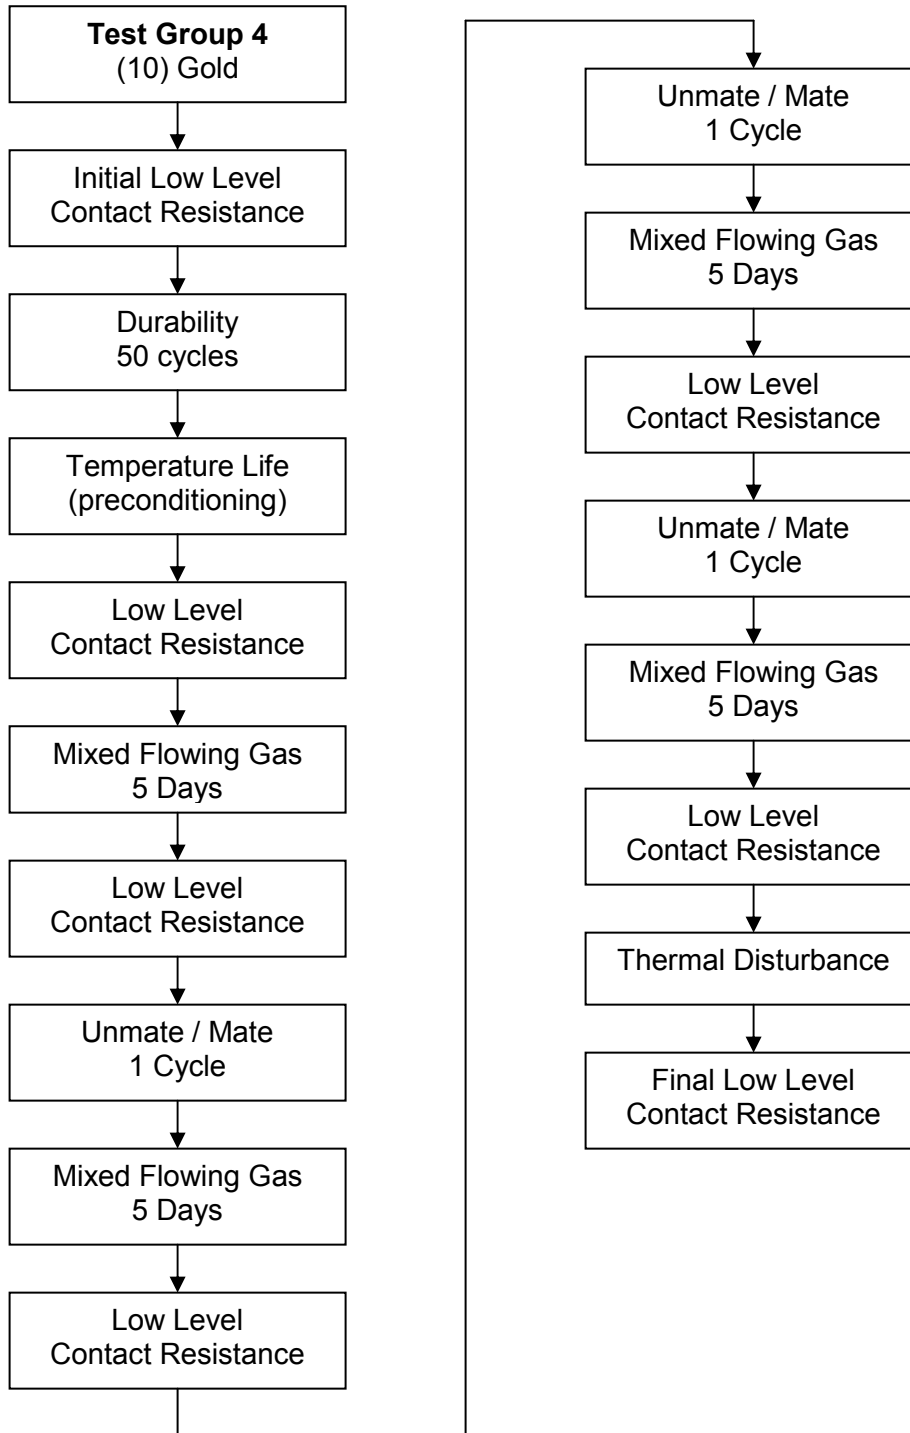


REVISION: C1	ECR/ECN INFORMATION: EC No: UCP2011-0141 DATE: 2010 /07/15	TITLE: PRODUCT SPECIFICATION FOR MINI-FIT PLUS HCS CONNECTOR SYSTEM	SHEET No. 12 of 13
DOCUMENT NUMBER: PS-45750-001	CREATED / REVISED BY: BWIRKUS	CHECKED BY: BWIRKUS	APPROVED BY: APATEL






PRODUCT SPECIFICATION

7.0 TEST SEQUENCES (CON'D)

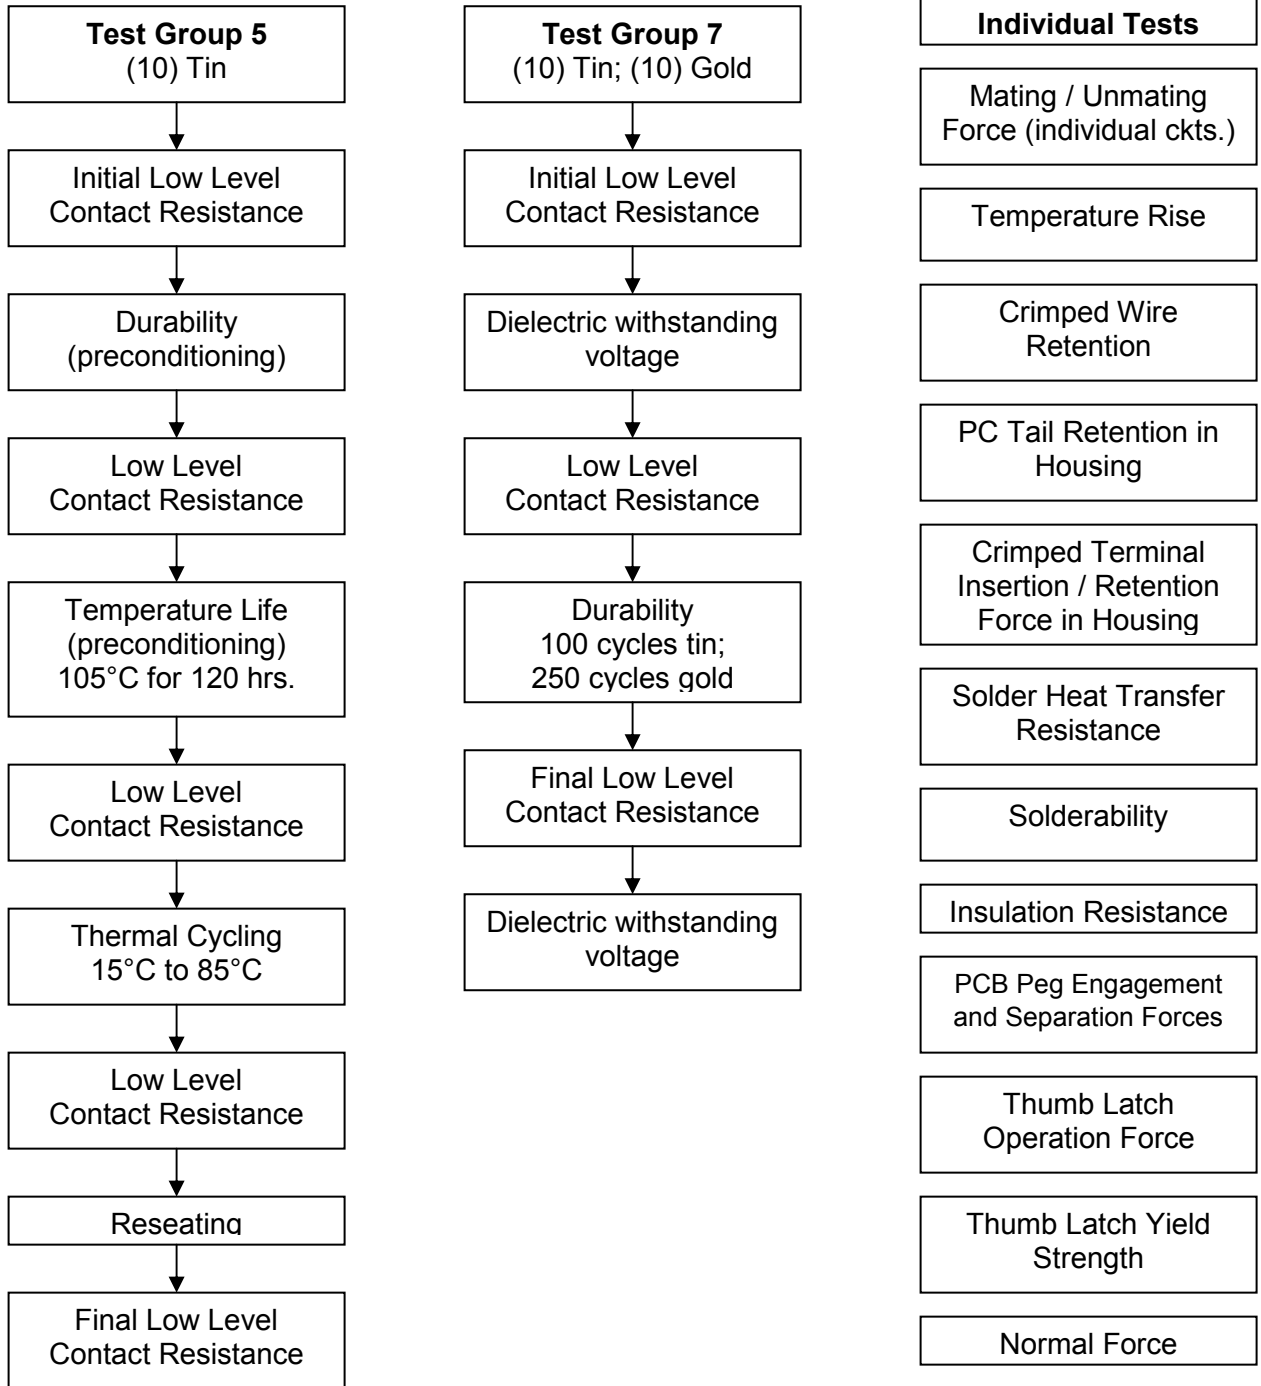


REVISION: C1	ECR/ECN INFORMATION: EC No: UCP2011-0141 DATE: 2010 /07/15	TITLE: PRODUCT SPECIFICATION FOR MINI-FIT PLUS HCS CONNECTOR SYSTEM	SHEET No. 13 of 13
DOCUMENT NUMBER: PS-45750-001	CREATED / REVISED BY: BWIRKUS	CHECKED BY: BWIRKUS	APPROVED BY: APATEL

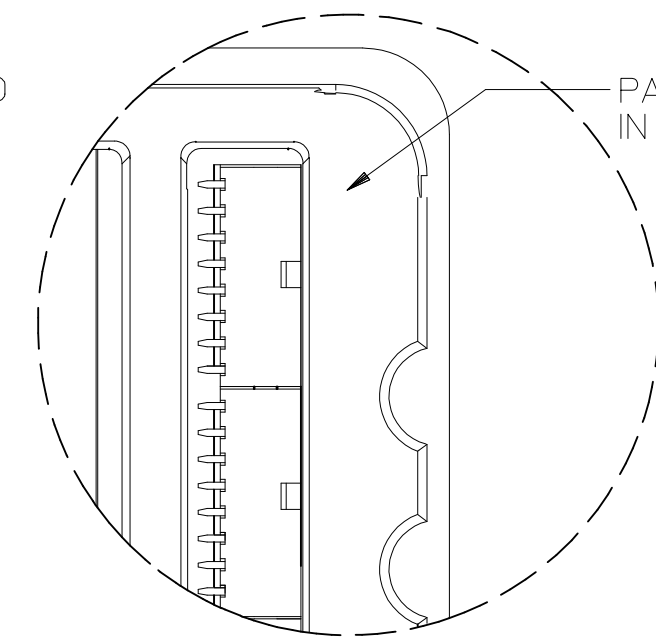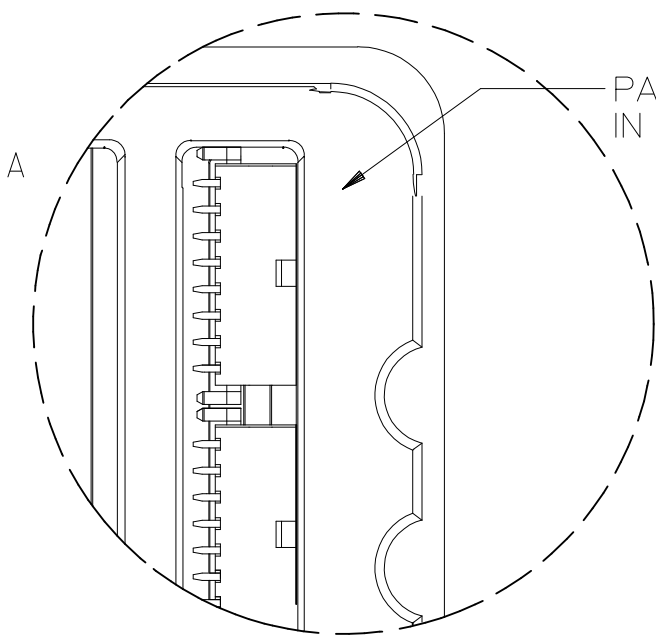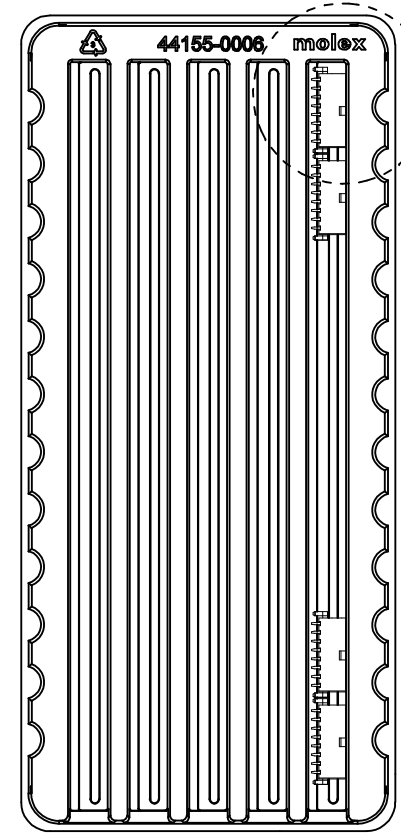

DETAIL A

HEADER WITH PEGS			
NO. OF CKTS	PARTS PER TRAY	PARTS PER BOX	QUANTITY PER MASTER CARTON
2	140	1680	6720
4	100	1200	4800
6	80	960	3840
8	65	780	3120
10	55	660	2640
12	50	600	2400
14	45	540	2160
16	40	480	1920
18	35	420	1680
20	30	360	1440
22	30	360	1440
24	25	300	1200

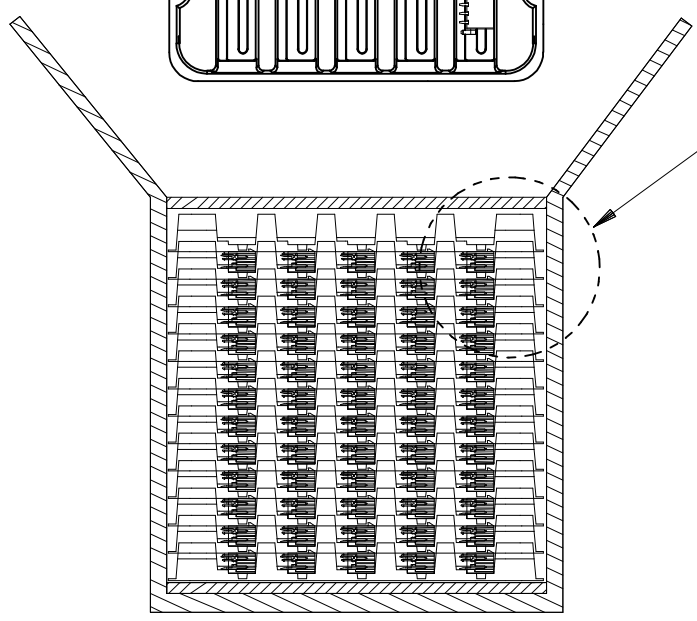

SEE DETAIL B



FOAM NO.:
96720-0001 (QTY:2)
OR EQUIVALENT

TRAY 44155-0006 (QTY: 13)
(12 WITH PARTS AND 1 EMPTY)

BOX: 96707-0001
(QTY: 1)

BOX: 96707-0001
(QTY: 4)

MASTER CARTON:
96708-0008 (QTY: 1)

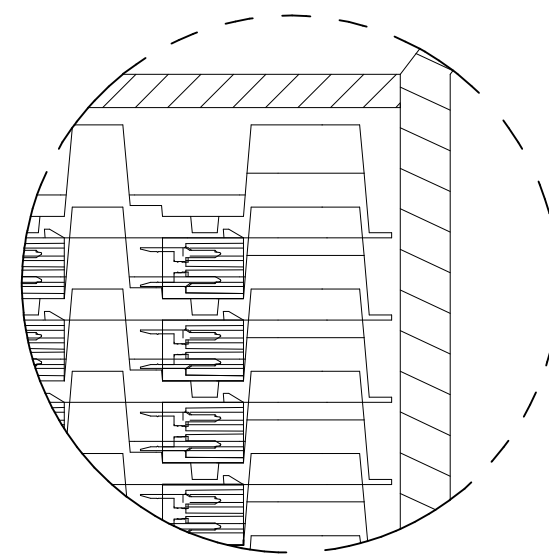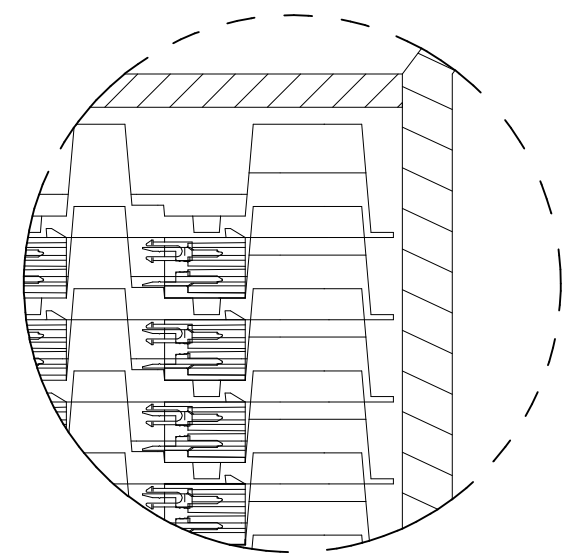

PARTS WITH PEGS

PARTS WITHOUT PEGS

PRODUCT LABEL

PRODUCT LABEL

HEADER WITHOUT PEGS			
NO. OF CKTS	PARTS PER TRAY	PARTS PER BOX	QUANTITY PER MASTER CARTON
2	280	3360	13440
4	160	1920	7680
6	115	1380	5520
8	85	1020	4080
10	70	840	3360
12	60	720	2880
14	50	600	2400
16	45	540	2160
18	40	480	1920
20	35	420	1680
22	30	360	1440
24	30	360	1440

DETAIL B

CHANGE FOAM P/N
EC NO: UCP2017-1294
DRWN:CSLAFTER 2016/12/08
CHKD:JBELL 2016/12/08
APPR:FSMITH 2016/12/20

REV	DESCRIPTION
D2	

QUALITY SYMBOLS		
	= 0	
	= 0	
	= 0	

GENERAL TOLERANCES (UNLESS SPECIFIED)	
	IN/MM
4 PLACES	± ---
3 PLACES	± ---
2 PLACES	± ---
1 PLACE	± ---
0 PLACE	± ---
ANGULAR ±1/2°	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
IN/MM			INCH	
DRAWN BY	DATE	TITLE		
ADRNATNOL	2005/09/20	PACKAGING SPECIFICATION		
CHECKED BY	DATE	MINI-FIT JR DUAL ROW		
GPOLGAR	2005/09/20	5566 SERIES		
APPROVED BY	DATE	molex		
FSMITH	2016/12/20	MATERIAL NO.	DOCUMENT NO.	SHEET NO.
			PK-5566-001	1 OF 1

NOTES:
1. THIS PACKAGING SPECIFICATION IS FOR DUAL ROW ASSEMBLIES ONLY.
SERIES #5566, 44472, 46015, 172675, 172447, 42382, 43588, 43460, 46216.



PACKAGING TEST REPORT

1.0 PRODUCT DESCRIPTION

1.1 PROGRAM NAME:

Mini-Fit® Jr.

1.2 SERIES/FAMILY NUMBER(S) COVERED BY PACKAGING:

5566, 44472, 46015 Dual Row R/A Header

1.3 ACTUAL PRODUCT PART / SERIES NUMBER(S) TESTED:

39-29-9067, 5566-06A2-210

1.4 MATERIAL STATUS OF TESTED PARTS:

Production

1.5 MATERIAL STATUS OF PRIMARY PACKAGING:

Production

2.0 APPLICABLE DOCUMENTS AND SPECIFICATIONS

2.1 TESTING PROCEDURES AND SEQUENCES:

Drop Test Procedure ES-40000-7001 Section 5.2.1
Lab Procedure SAP Document 10000002317

2.2 PACKAGING SPECIFICATION :

PK-5566-001 Rev B

3.0 QUALIFICATION INFORMATION

3.1 PRE-INSPECTION RESULTS:

Pass

3.2 INSPECTION GAGES:

Gage number: N/A

3.3 DATE OF DROP TEST:

12/6/2006

3.4 WEIGHT OF FULLY LOADED DROP PACKAGE:

5.3 lbs / 2.4 kg

3.5 ASSURANCE LEVEL AND DROP HEIGHT:

Assurance Level = II
Drop Height = 24" / 609.6 mm

3.6 EQUIPMENT USED IN TESTING:

Manual drop test

<u>REVISION:</u> A	<u>ECR/ECN INFORMATION:</u> EC No: UCP2014-4406 DATE: 2014 / 05 / 01	<u>TITLE:</u> PACKAGING TEST REPORT FOR 5566 / 44472 / 46015 DUAL ROW	<u>SHEET No.</u> 1 of 2
<u>DOCUMENT NUMBER:</u> TS-5566-002	<u>TESTED BY:</u> Matt Kipper	<u>PRODUCT ENGINEER</u> Jeff Bell	<u>AQP:</u> Fran Smith



PACKAGING TEST REPORT

4.0 RESULTS

4.1 CARTON APPEARANCE:

OK

4.2 PRIMARY PACKAGING APPEARANCE:

Pass

4.3 POST-INSPECTION RESULTS:

Pass

4.4 TEST PROCESS OBSERVATIONS:

None

4.5 PACKAGING TEST PASS OR FAIL AND EXPLANATION:

Pass, zero damaged parts.

<u>REVISION:</u> A	<u>ECR/ECN INFORMATION:</u> EC No: UCP2014-4406 DATE: 2014 / 05 / 01	<u>TITLE:</u> PACKAGING TEST REPORT FOR 5566 / 44472 / 46015 DUAL ROW	<u>SHEET No.</u> 2 of 2
<u>DOCUMENT NUMBER:</u> TS-5566-002	<u>TESTED BY:</u> Matt Kipper	<u>PRODUCT ENGINEER</u> Jeff Bell	<u>AQP:</u> Fran Smith